


Fire Alarm Bell



Features

- Approved 
- High dBA Sounds Output.
- Low Power Consumption.
- Available in 6", 8" Housing.
- Quickly and Easily Installed.




LISTED
1124

Fire Alarm Bell Ø 6", 8"



ULSZ.S9014
Audible Signal Appliances
AIP-624B
AIP-1024
AIP-1220

Installation Note

- Remove bell gong by loosening hex bolt.
- Wire bell in circuit.(Notice Polarity)
- Mount bell mechanism on 4" square standard outlet box with the striker facing down.
- Replace the gong and tighten hex bolt.
- The bell must be mounted a minimum of 8ft above the floor, or as close to the ceiling as possible.
- Polarized bell provides Red(+) and Black(-) lead wires. When you install the bell, must observe the polarity.

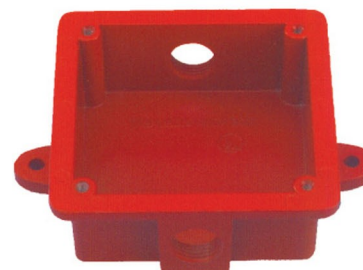

Waterproof Back Box

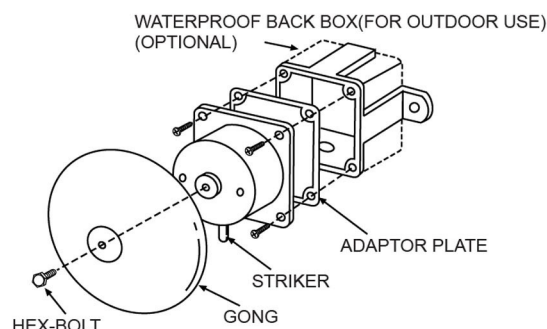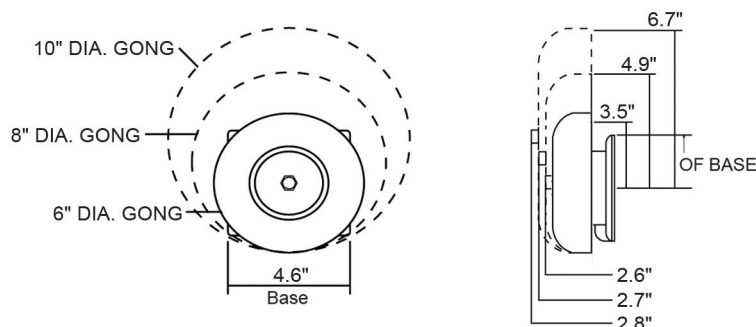

Motor Driven Type Alarm Bell

Model	Gong Size (Inch)	Rated Voltage	Rated Current	db at 10ft(3m)	Approval
AIP-624B	Ø 6	24V DC	20mA	95	UL

Coil Driven Type Alarm Bell

Model	Gong Size (Inch)	Rated Voltage	Rated Current	db at 10ft(3m)	Approval
AIP-1024	Ø 8	24V DC	100mA	96	UL
AIP-1220	Ø 6	220V AC	20mA	97	UL