

300 PSI rated pressure




A95

EXPOSED FIRE DEPT. INLET CONNECTION

Two way-single clapper-back

Branding:
"AUTO SPKR"



SIZE (a x b)	CERTIFICATIONS	A	B
4" x 2 1/2"		5 33/64"	8 5/64"

Used as an auxiliary inlet connection providing 500 GPM minimum to supplement the fire protection water supply. Swing clapper provides full waterway. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

Standard equipment:

Cast brass two-way inlet body with single swing clapper and pin or rocker lug hose thread swivel; straight NPT outlet connection.

RELATED PRODUCTS



A81 p. 35

300 PSI rated pressure




A96

EXPOSED FIRE DEPT. INLET CONNECTION

Two way-single clapper-angle

Branding:
"AUTO SPKR"

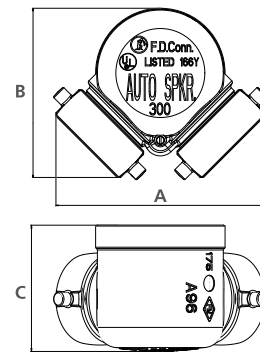

SIZE (a x b)	CERTIFICATIONS	A	B	C
4" x 2 1/2"		8 5/64"	6 11/16"	4 29/32"

Used as an auxiliary inlet connection providing 500 GPM minimum to supplement the fire protection water supply. Swing clapper provides full waterway. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

Standard equipment:

Cast brass two-way inlet body with single swing clapper and pin or rocker lug hose thread swivel; angle NPT outlet connection.

RELATED PRODUCTS



A81 p. 35