




GOMDUR® 4K

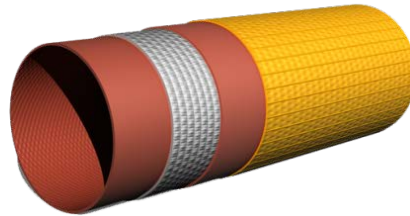

Performance

- Very resistant to both contact and radiant heat.
- Excellent resistance to abrasion and intensive use by professionals.
- Highly resistant to oil, gasoline and a wide range of chemicals.
- Flexible hose even at low temperatures (-15°C).
- Highly resistant to breakage thanks to the specially-made textile.
- No maintenance or drying necessary.
- Available for compliance with various international certifications.

Uses

- Forestry.
- Fire-fighting and industrial use.
- Refineries and heavy industry.
- Airports.
- Structural and urban fires.

Construction

Interior and exterior layer:

Specially-formulated red nitrile rubber, extruded through the circular fabric. Minimal flow loss thanks to its smooth interior wall. High thermal resistance.

Reinforced middle textile:


Circular weaved outer layer made from high tenacity polyester thread. No defects (broken threads, knots, etc.)

Exterior layer (4th layer):

Yellow rubber (highly visible), specially formulated with para-aramid fibres to impart high resistance to abrasion, temperature by contact or environment, and chemicals. With outer grooves to improve resistance to abrasion and make it easy to use.



GOMDUR® 4K

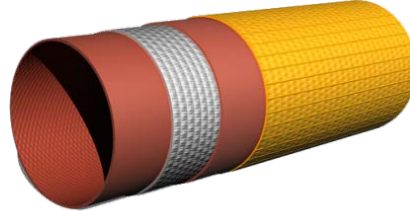

Technical characteristics

DIAMETER		WEIGHT	THICKNESS	WORKING PRESSURE	TEST PRESSURE	BREAKAGE PRESSURE
INCHES	MM.	GR/M.	MM.	BARS	BARS	BARS
1"	25	260	2,30	30	60	>90
1 ^{1/2} "	38	385	2,25	21	45	>62
1 ^{3/4} "	45	420	2,10	21	45	>62
2"	52	550	2,30	20	40	>60
2 ^{1/2} "	64	680	2,30	17	35	>52
2 ^{3/4} "	70	700	2,30	17	35	>50
3"	75	780	2,30	17	35	>50