



Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S, HPS-DAK, HPS-DAK/S Manual Non-Coded Pull Station



HPS-SAH



HPS-SAK



HPS-DAH



HPS-DAH/S



HPS-DAK



HPS-DAK/S

STANDARD FEATURES

- Metal Construction
- Enclosed switch with glass rod (included)
- 10 Amps @ 120 VAC
- Available in: Single Action, Dual Action and Dual Action in Spanish (HPS-DAH/S)
- UL, CSFM Listed
- Made in USA

DESCRIPTION

Hochiki America's Models HPS series pull stations are available in six models:

- HPS-SAH - single action with Hex lock
- HPS-SAK - single action with Key lock
- HPS-DAH - dual action with Hex lock
- HPS-DAH/S - dual action with Hex lock (Spanish)
- HPS-DAK - dual action with Key lock
- HPS-DAK/S - dual action with Key lock (Spanish)

Each model is constructed of a solid die cast housing and comes in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 VDC normally open contact rating. All models are connected via terminal block connections.

PRODUCT LISTINGS

SIGNALING



California State
Fire Marshal
7150-0410:162

Specifications subject to change without notice.

Continued on back.

Hochiki America Corporation
7051 Village Drive, Suite 100, Buena Park, CA 90621-2268
Phone: 714-522-2246 Fax: 714-522-2268
Technical Support: 800-845-6692 or technicalsupport@hochiki.com




Find latest revision at www.hochiki.com


F0033 06/2017

**Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S, HPS-DAK, HPS-DAK/S
Manual Non-Coded Pull Station**

Rear View

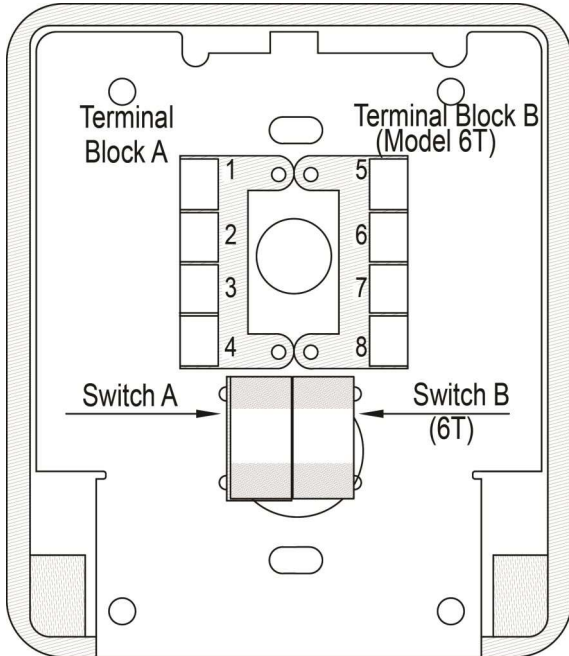

Front View

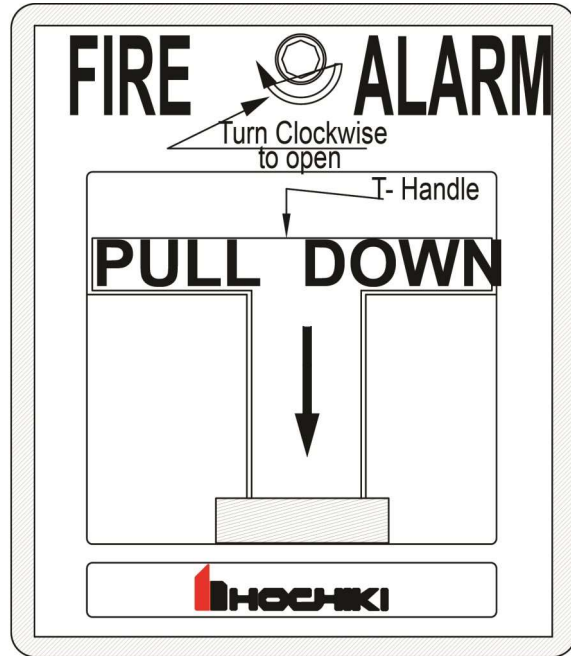

SPECIFICATION

Model	SAH, SAK, DAH, DAH/S, DAK, DAK/S	EXP./WTP. PRF
Contact	SPST Form "A"	DPDT Form "C"
Terminal Block	A	A & B
Terminal Connecting	2 & 3	1, 2, 3, 5, 6, 7
Terminal Connection LED	1 (+) & 4 (-)	4 (+) & 8(-)
Terminal Connection Switch	1 & 4	4 & 8
Terminal Connection Phone Jack	1 & 4	4 & 8
Contact Rating	10A @ 120 VAC	10A @ 120 VAC
Operating Temperature	-30°F (-35°C) ~ 150°F (66°C)	-30°F (-35°C) ~ 150°F (66°C)
Dimensions	HPS-SAH_SAK	3.2"W x 4.75"H x .875"D
	HPS-DAH_DAH-S	3.325"W x 4.75"H x 1.625"D
	HPS-DAK_DAK-S	3.325"W x 4.75"H x 1.625"D

ELECTRICAL WIRING

