

Rack Hose - RBX

Single Jacket, TPU Liner




Features

- 100% filament polyester as both warp and weft/filler
- Compact and Light weight
- Easy to deploy
- Pin folded for ease of installation
- Low friction loss for maximum flow
- Additional coatings available to increase the abrasion resistance
- Temperature range from -58°F to 158°F (-50°C to 70°C)



Construction

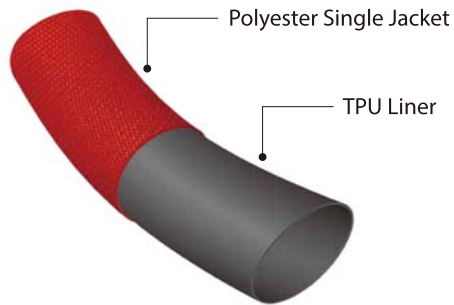

Standard

- FM 2111/2131, UL, ULC219 approved



Technical Data

Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Certification
inch	mm	psi	bar	psi	bar	psi	bar	
1-1/2"	38	250	17	500	34	750	51	
1-3/4"	45	250	17	500	34	750	51	
2"	52	250	17	500	34	750	51	
2-1/2"	65	250	17	500	34	750	51	