

Rack Hose - RBS


Single Jacket, TPU Liner

Features

- Compact and Light weight
- Easy to deploy
- Pin folded for ease of installation
- Low friction loss for maximum flow
- Additional coatings available to increase the abrasion resistance
- Temperature range from -40°F to 158°F (-40°C to 70°C)
- Spun polyester as warp
- Filament polyester as weft/filler



Construction

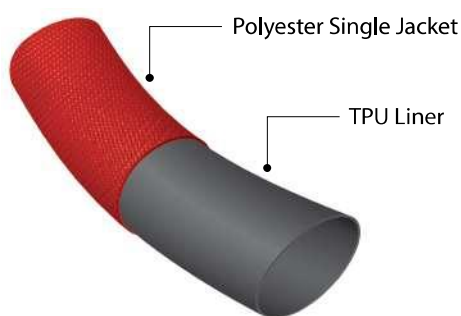

Standard

- FM 2111/2131 approved

Technical Data

Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Certification
inch	mm	psi	bar	psi	bar	psi	bar	
1-1/2"	38	150, 250	10, 17	300, 500	20, 34	450, 750	30, 51	
1-3/4"	45	150, 250	10, 17	300, 500	20, 34	450, 750	30, 51	
2"	52	150, 250	10, 17	300, 500	20, 34	450, 750	30, 51	
2-1/2"	65	150, 250	10, 17	300, 500	20, 34	450, 750	30, 51	