



Pin Rack Hose Assembly



pin rack assembly

- Components include: rack nipple, U/L 300 PSI angle valve, semi-automatic fire hose pin rack, brass rack nozzle, and a length of 1½" pin rack hose
- U/L listed and Factory Mutual approved

NH (NST) Thread	Hose	Part #	Wt. Lbs.
1½"	50'	FHPR150-50CBF	20
1½"	75'	FHPR150-75CBF	25
1½"	100'	FHPR150-100CBF	30



Semi Automatic Fire Hose Pin Rack



pin rack

- red steel enameled
- holds up to 100' of either 1½" or 2½" rack hose
- 1½" is U/L listed and Factory Mutual approved

Hose Size	For use with:			Part #	Powhatan Part #	Wt. Lbs.
	Size	Valve	Nipple			
1½"	1½"	AVF150	PRN150F	FHPR150	30-333-00038	4.4
1½"	2½"	AVF250	PRN250F	FHPR2515	30-333-00019	4.5

Pin Rack Cover



pin rack cover

- 10 oz. red vinyl with Velcro™ closures

Size	Use with	Part #	Wt. Lbs.
25" x 30" x 6"	FHPR150	PRC	1.2

Pin Rack Nipples



rack nipple

- material: **brass**
- finish: -C polished chrome plated

Male NPT	Male NH (NST)	Part #	Powhatan Part #	Wt. Lbs.
1½"	1½"	PRN150F	14-136-00287	0.8
1½"	1½"	PRN150F-C	14-136-00305	0.8
2½"	2½"	PRN250F	14-136-00288	2.2
2½"	2½"	PRN250F-C	14-136-00462	2.2

Pin Rack Wall Bracket



wall bracket

- aluminum wall bracket used to support hose rack independent of stand pipe valve

Part #	Powhatan Part #	Wt. Lbs.
PRWB	46-019-01561	0.7



2 1/2" FNPT x FNPT

1 1/2" FNPT x FNPT

HC-102(DWG.J281)

ANGLE HOSE VALVE

300lb. RATED

Used with a Fire Hose Rack Assembly

Or as a Fire Dept. outlet connection

DOUBLE FEMALE

Standard equipment:

Female NPT inlet and outlet forge brass valve

Outlet cast brass valve


Red hand wheel.

Optional Finishes:

PB-Polished Brass

RC-Rough Chrome Plated

PC-Polished Chrome Plated

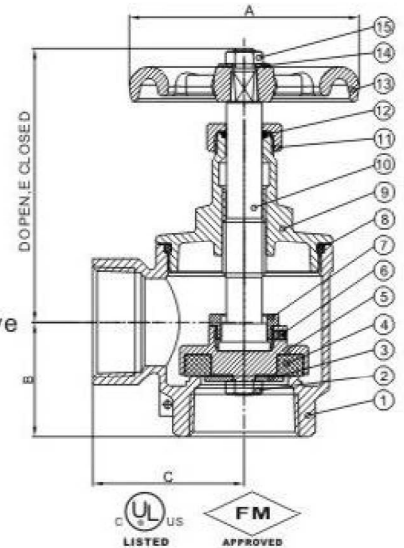

	A	B	C	D	E
1 1/2" x 1 1/2"	3.94	1.97	2.60	4.70	5.71
2 1/2" x 2 1/2"	4.92	2.68	3.27	6.18	7.87

NO	DESCRIPTION	MATERIALS	NO	DESCRIPTION	MATERIALS
1	BODY	ASTM B283 C37700	9	BONNET	ASTM B283 C37700
2	WHEEL NUT	ASTM B283 C37700	10	STEM	ASTM B283 C37700
3	WASHER	SS304	11	LOCK NUT	ASTM B283 C37700
4	SEAT SEAL	NBR	12	ORING	NBR
5	HOLDER	ASTM B283 C37700	13	HANDLE WHEEL	DUCTILE IRON
6	SET SCREW	SS304	14	WHEEL WASHER	SS304
7	LOCK NUT	ASTM B283 C37700	15	WHEEL NUT	ASTM B283 C37700
8	ORING	NBR			

Fog Nozzles

Features

- Shutoff - straight stream - fog
- Brass stem

Specification

- Maximum operating pressure: **100 PSI**
(water only) at **70°F (21°C)**

Size	Thread	90° Spray GPM @ 100 PSI	Polycarbonate ¹ Part #	Polycarbonate ² Part #
3/4"	GHT	8.0	FNB75GHT ^{3,4}	---
	NPS	30.9	FNB75S ⁴	---
1"	NPS	11.4	FNB100S ⁴	FN100S
		30.9	HGB100S	---
1-1/2"	NPS	83.6	FNB150S	FN150S
1"	NST (NH)	11.4	FNB100NST	FN100NST
		30.9	HGB100NST	---
1-1/2"	NST (NH)	83.6	FNB150NST	FN150NST

¹ With bumper

² Without bumper

³ Standard flow

⁴ 120° spray GPM @100 PSI

NOTE: Replacement washers can be found on page 19



with bumper



without bumper

Fog Nozzle Flow Rate Chart

Part #	Inlet Pressure		Straight Stream		30°		60°		90°	
	PSI	kPa	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM
BFN100	50	(345)	18	(68)	21	(79)	24	(91)	27	(102)
	75	(517)	22	(83)	25	(95)	28	(106)	32	(121)
	100	(690)	24	(91)	28	(106)	32	(121)	36	(136)
BFN250	50	(345)	90	(341)	120	(454)	130	(492)	145	(549)
	75	(517)	100	(379)	140	(530)	150	(568)	180	(681)
	100	(690)	110	(416)	165	(625)	180	(681)	205	(776)
HFN100	100	(690)	25	(95)	---	---	---	---	---	---
HFN150	100	(690)	---	---	---	---	---	---	86	(326)
HPFN150	275	(1040)	---	---	---	---	---	---	130	(492)

Domestic Rack Nozzles

Features

- Delivers 30° - 60° - 90° fog pattern - shut-off - straight stream - fog
- Supplied without bumper

Approvals

- UL listed and Factory Mutual approved for class A and B fires
- Products are to be reapproved; data subject to change in coming months

Specification

- Maximum operating pressure: **100 PSI**
(water only) at **70°F (21°C)**

Size	Thread	Wide Open GPM @ 100 PSI	Brass Part #
1-1/2"	NST (NH) NPSH	100	BRN150NST BRN150

NOTE: Replacement washers can be found on page 19



Global Rack Nozzles

Features

- Delivers 30° - 60° - 90° fog pattern - shut-off - straight stream - fog
- Supplied without bumper

Approvals

- UL listed and Factory Mutual approved for class A and B fires
- New UL and FM approvals are pending due to change in standard UL 401
- Products are to be reapproved; data subject to change in coming months

Specification

- Maximum operating pressure: **100 PSI**
(water only) at **70°F (21°C)**

Size	Thread	Wide Open GPM @ 100 PSI	Brass Part #
1-1/2"	NST (NH) NPSH	100	BRN150NST-I BRN150S-I

NOTE: Replacement washers can be found on page 19



Rack Hose - RBX

Single Jacket, TPU Liner




Features

- 100% filament polyester as both warp and weft/filler
- Compact and Light weight
- Easy to deploy
- Pin folded for ease of installation
- Low friction loss for maximum flow
- Additional coatings available to increase the abrasion resistance
- Temperature range from -58°F to 158°F (-50°C to 70°C)



Construction

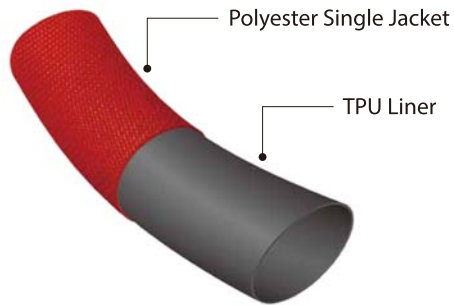

Standard

- FM 2111/2131, UL, ULC219 approved



Technical Data

Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Certification
inch	mm	psi	bar	psi	bar	psi	bar	
1-1/2"	38	250	17	500	34	750	51	
1-3/4"	45	250	17	500	34	750	51	
2"	52	250	17	500	34	750	51	
2-1/2"	65	250	17	500	34	750	51	

FIRE HOSE

INDUSTRIAL HOSE

AGRICULTURAL HOSE

POTABLE WATER HOSE

MARINE HOSE

OIL & GAS HOSE

COUPLINGS