Angle Valves

The Right Connection®

Female x Male

Application
- Commercial fire protection

Sizes
- 1-1/2" and 2-1/2"

Features
- Male outlet - Specify thread
- NPT inlet thread only

Materials
- Body: Forged brass C37700-DZR
- Handwheel: Aluminum
- Disc: Nitrile rubber
- Available finishes:
  - forged(standard)
  - polished= -P
  - chrome= -C

Specification
- Working pressure: **300 PSI** at **70°F (21°C)**

Approvals
- UL listed
- FM approved

Female x Female

Application
- Commercial fire protection

Sizes
- 1-1/2" and 2-1/2"

Features
- NPT inlet and outlet only

Materials
- Body: Forged brass C37700-DZR
- Handwheel: Aluminum
- Disc: Nitrile rubber
- Available finishes:
  - forged(standard)
  - polished= -P
  - chrome= -C

Specification
- Working pressure: **300 PSI** at **70°F (21°C)**

Approvals
- UL listed
- FM approved

Product Codes

SERIES	SIZE	TYPE
AVF150-F	1-1/2" x 1-1/2"	NPT-F inlet x NPT-F outlet
AV150-F	1-1/2" x 1-1/2"	NPT-F inlet x NH-M outlet
AV150S-F	1-1/2" x 1-1/2"	NPT-F inlet x NPSH-M outlet
AV150T-F	1-1/2" x 1-1/2"	NPT-F inlet x NPT-M outlet
AVF250-F	2-1/2" x 2-1/2"	NPT-F inlet x NPT-F outlet
AV250-F	2-1/2" x 2-1/2"	NPT-F inlet x NH-M outlet
AV250S-F	2-1/2" x 2-1/2"	NPT-F inlet x NPSH-M outlet

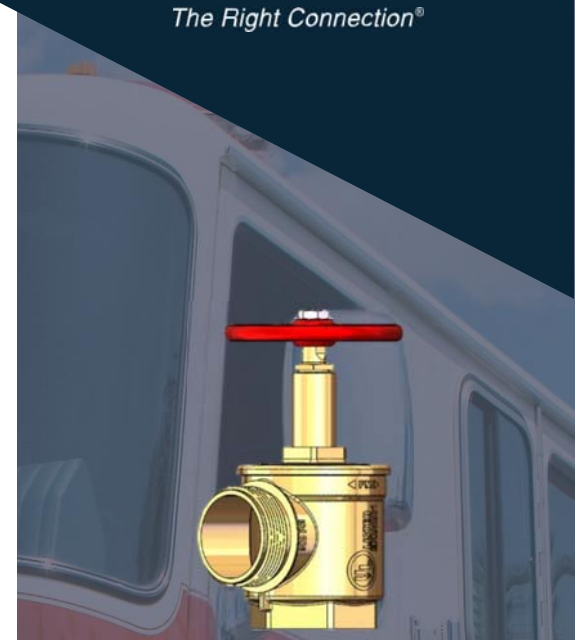

Female x Male

Female x Female

Dixon China
Room 1601 Sun Building
No 3553 North Zhongshan Road | Putuo District
Shanghai 200062
Ph: +86 021 6173 7998*296
Fax: +86 021 6173 7998
www.dixonvalve.com.cn