

300 PSI rated pressure



A105

EXPOSED FIRE DEPT. INLET CONNECTION
CLAPPER TYPE


Two way double clapper back

Branding: A105/1 - AUTO-SPKR,
A105/2 - STANDPIPE, A105/3 - PLAIN

Polished
Brass



Polished
Chrome



SIZE (a x b)

CERTIFICATIONS

A

B

4" x 2 1/2"



LISTED 166Y
175 PSI

7 9/32"

11 21/32"

4" x 3"



LISTED 166Y
300 PSI

8 1/32"

12 27/32"

6" x 2 1/2"



LISTED 166Y
175 PSI

8 5/32"

11 21/32"

6" x 3"



LISTED 166Y
300 PSI

8 23/32"

12 7/8"

Used as an auxiliary inlet connection providing 500 GPM minimum to supplement the fire protection water supply. Swing clapper provides full waterway. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

Standard equipment:

Cast brass two-way inlet body with double drop clappers and pin lug hose thread swivels; straight NPT outlet connection.

RELATED PRODUCTS



A81 p. 35

300 PSI rated pressure




A105

EXPOSED FIRE DEPT. INLET CONNECTION
CLAPPER TYPE

Three way triple clapper back

Branding:
A105/1 - AUTO-SPKR
A105/2 - STANDPIPE

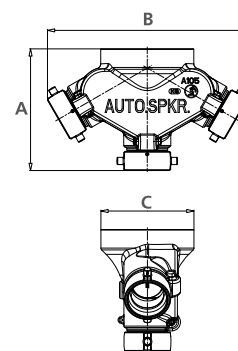

SIZE (a x b)

A

B

C

4" x 2 1/2"

9 17/64"

15 13/64"

7 3/32"

6" x 2 1/2"

9 17/64"

15 13/64"

7 3/32"

Used as an auxiliary inlet connection providing 500 GPM minimum to supplement the fire protection water supply. Swing clapper provides full waterway. Exposed design provides an economical method of satisfying Fire Dept. inlet requirements.

Standard equipment:

Cast brass three-way inlet body with triple drop clappers and pin lug hose thread swivels; straight NPT outlet connection.

RELATED PRODUCTS



A81 p. 35