

SILENT CHECK VALVE

- ANSI CLASS 125/250
- WAFER TYPE
- FLANGE





MATERIAL SPECIFICATION	
PART	MATERIAL
1. Body	Cast Iron, A126 Class B
2. Seat	Stainless Steel, A351 CF8
3. Disc	Bronze, B62 C83600
Option	Stainless Steel, A351 CF8
4. Spring	Stainless Steel, AISI 304
5. Bushing	Bronze, B62 C83600



MODEL SL-10330

TECHNICAL FEATURES	
Nominal Pressure	200 psi.
Hydraulic Shell Test Pressure	400 psi.
Hydraulic Seat Test Pressure	250 psi
200 psi at	-10°C to 120°C
200 psi at	14°F to 250°F
Suitable Media	Water, Oil, Gas

DIMENSIONS				
Size		Dimensions		Wt.
In.	mm.	A	B	(kg)
2	50	113.0	67.0	2.80
2 1/2	65	127.0	73.0	4.00
3	80	146.0	80.0	6.00
4	100	188.0	102.0	9.20
5	125	213.0	118.0	14.50
6	150	248.0	140.0	22.00
8	200	340.0	165.0	32.50
10	250	410.0	216.0	56.00
12	300	415.0	286.0	98.00
14	350	478.0	350.0	140.00

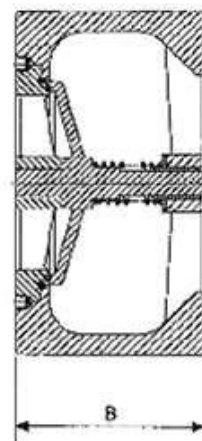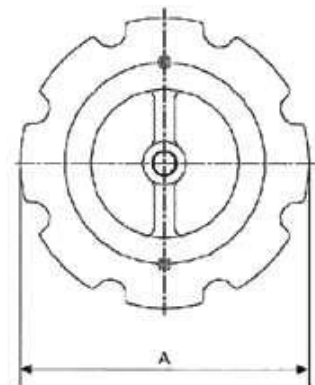

Note: Installation Position : Valves an be installed in any position i.e. horizontal or vertical

Information In This Brochure Is Subject To Alteration Without Notice Under Continual Improvement By Manufacturer.