



Nitrile Rubber Covered Hose-DUZ Series

This type of durable hose is Nitrile rubber covered hose, and along with high tensile strength polyester reinforcement for maximum durability and flexibility.


- Ribbed Nitrile rubber cover greatly increases abrasion resistance and provides long service life.
- Smooth Nitrile rubber liner minimum pressure drop.
- Hose remains flexible to temperatures as low as -4°F (-20°C) and is resistant to ozone, oxidation, and most chemicals or petroleum products.
- Polyester and/or Nylon reinforcement, tightly woven, twill weave resists puncture.

Pressure Requirement:

(Inch)	I.D. (mm)	Service Test Pressure (Psi)	Burst Pressure (Psi)
1"	25.4	200,250,300	600,750,900
1-1/2"	38.1	200,250,300	600,750,900
2"	50.8	200,250,300	600,750,900
2-1/2"	63.5	200,250,300	600,750,900
3"	76.2	200,250,300	600,750,900
4"	101.6	200	600
5"	127.0	200	600
6"	152.4	150	450

Construction:

Nitrile rubber cover and liner. Polyester and/or Nylon reinforcement.

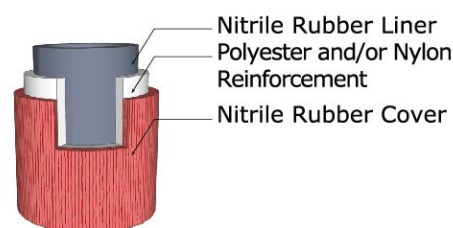

Application:

Municipal fire fighting, industrial fire fighting, In-Plant fire protection, rough duty wash down, installations in high oil-resistance conditions, supply hose.

Color: Yellow, red, other colors on request.

Couplings: On request.

Standard Length:

50', 75', 100', 150', 200', please inquire for other length before placing order.

Temperature Range: -4°F to 175°F (-20°C to 80°C), based on water.