



AH-9717



AH-9717

Manual Call Point & Telephone Handset

Features

- Emergency press alarm, immediately activates fire alarm signal.
- Indicator light above fire alarm push-button confirms the alarm signal transfer.
- There are a phone jack and reset button behind the cover cap.
- Type I is simultaneous dual loop, Type II is simultaneous dual signal transfer (refer to diagram below)
- Optional base is available.

Specifications


Model	AH-9717
Operating Power	24V DC 30mA
Operating Contact	Max. 30V DC 500mA
Sub-function	Phone jack, confirmation LED, reset button.
Material	Fire-proof plastic
Dimensions	140mm(Dia.) x 45mm(H)
Weight	About 160g



Telephone Handset



Bag for Telephone Handset

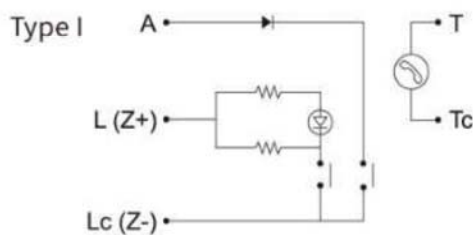


HORING LIH INDUSTRIAL CO., LTD.

4F., No. 18, Lane 327, Chung Shan Road, Sec. 2, Zhonghe District 235, New Taipei City, **Taiwan**

Tel : +886 2 22487599 Fax : +886 2 22407752 Email : export@horinglih.com Website : www.horinglih.com

BASE

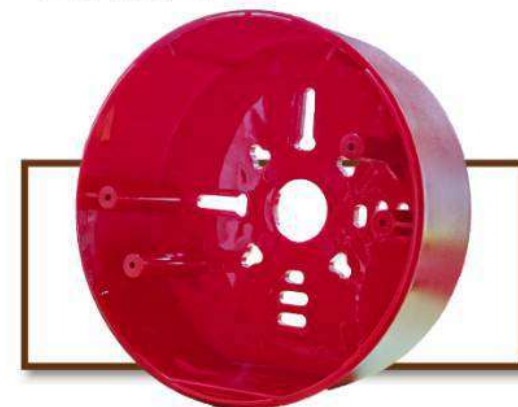

S-342 Base Manual Call Point

S-342 Surface Mounting Base



FEATURES

Base Manual Call Point

Product Brand Horing Lih Model : AH-97 17

Product Brand Cemen Model : S-336

Product Brand CL Model : CL-202

Product Brand AIP Model : AH-97 17

- ★ Suitable for surface mounting.
- ★ Quickly and easily installed.
- ★ Indoor base.

SPECIFICATION

Base Manual Call Point

- MODEL : S-342
- MATERAIL : Plastic ABS
- COLOR : RED
- SIZE : 140 mm. x 50 mm.
- PRODUCT : Made in Thailand